

MUD MATS


Temporary

Portable Mud Mat

Don't get stuck in the muck. Mud Mat is a pocketed, double-wall, high-strength fabric with high tensile reinforcing ribs confined within pocket sleeves. Each Rib consists of a bamboo post of approximately 2" diameter secured individually within each pocket sleeve. Ground pressure from vehicle tires is reduced up to 40x allowing structural stability and minimal ground disturbance.



- Fast, portable and easy to deploy
- Reusable alternative to rock
- Easy to transport
- Allows site access in muddy/swampy conditions
- Mats connect together to form custom sizes

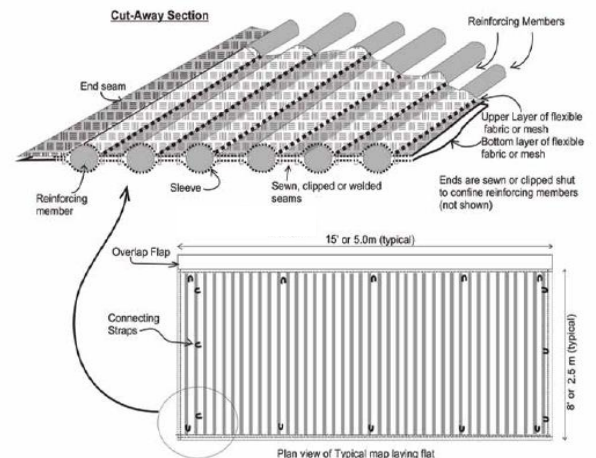

Mud Mat

Property	Test Procedure	Minimum Average Roll Value
Grab Tensile Strength	ASTM D-4632	802.6 lbs
Apparent Breaking Elongation	ASTM D-4632	25%/18%
Trapezoid Tearing Strength	ASTM D-4533	607 lbs
Puncture Resistance	ASTM D-4833	374.3 lbs
Mullen Burst	ASTM D-3786	456.88 psi
Apparent Opening Size	ASTM D-4751	70 US Sieve/0.212mm
Constant Head Permittivity	ASTM D-4491	20.16gpm/ft ²
Wide Width Tensile	ASTM D-4595	685.7 lbs/in ²
Material	Woven Geotextile	100% Polypropylene

Roll Size	8' x 15'
Weight	100 lbs Each

All properties are Minimum Average Roll Values (MARV)

For more information about materials from Erosion Supply, contact inside sales at 865-673-3427 or visit us on the web at www.erosionsupplytn.com

**Erosion
Supply**